

# JUPITER

SINGLE & PARALLEL  
AUTOCLAVABLE  
FERMENTER  
BIOREACTOR



SOLARIS  
BIOTECH SOLUTIONS



## JUPITER

This technical proposal describes a Solaris JUPITER. For supervisory control and data acquisition Leonardo 3.2 is included.

The system consists of jacketed fermenter/bioreactor (total volume), bench-top, pre-assembled unit, supplied with all necessary tubes, valves and instruments, automation, control panel (HMI).

The system is designed for aerobic and anaerobic cultivations/ fermentations, closed aseptic operations. The control is based on a SCADA control system.

## Customizable Configuration

different aspect ratio and thermoregulation strategies

## Applications



Process development and optimization



Education



Basic Research



Scale up and scale-down studies



Small production studies

- Aspect Ratio available:
  - D/H 3:1
  - D/H 2:1

- Jacketed and single-wall borosilicate glass vessel designs available for all volumes
- Different gas mixing strategies with up to 5 TMFC and/or solenoid valves, jacketed design : fully removable and cleanable glass jacket for improved heat transfer during autoclaving and single-wall design: thermoregulation performed with heating blanket and cooling finger.



- Modbus digital sensors reduce background noise and guarantee quick response time
- Suitable for batch, fed-batch and continuous processes



- Powerful and accurate (1 RPM) brushless motor


- Wide range of measurement and control options
- Optional integration of up to 4 analog input/output connections, choosing between 0-10 V and 0-20 mA/4-20 mA (e.g. pumps or valves with power supply independent from Solaris electrical cabinet)



- Sterile septum with single use membrane for manual feeding
- Leda: the innovative sterile sampling system for Solaris' autoclavable fermenters/bioreactors, which allows up to 180 sterile samplings per batch
- Pressure control up to 1.6 bar (with constant gas-in and gas-out flux) available in the 2 and 4 L volumes with jacketed design.


# Leonardo

- Innovative SCADA software LEONARDO: a smart and user-friendly controller designed to provide a high level of automated management of the fermentation/cultivation processes
- Full version included in the equipment supply
- Up to 24 units managed in parallel with a unique HMI (24")
- Data extraction in .csv format
- Remote access via PC, tablet or smartphone, with QR code scanning or dedicated portal
- Remote control

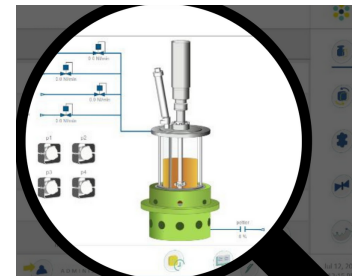


## Synoptic

- real time 3D view
- parallel control
- manual control

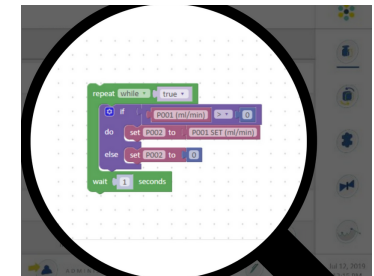


## Logic Parser

- customized logic functions
- parallel logic blocks and funtions

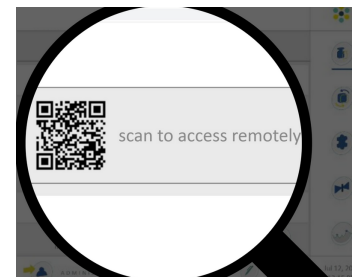


## Remote Control

- unlimited number of profiles editor
- unlimited number of devices to be associated

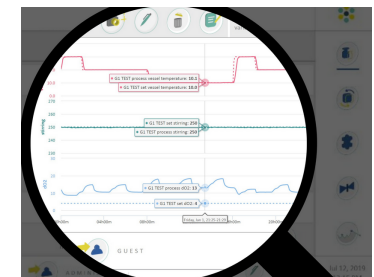


## Trends

- custom acquisition time
- up to 6 values simultaneously display
- automatic graph comparison

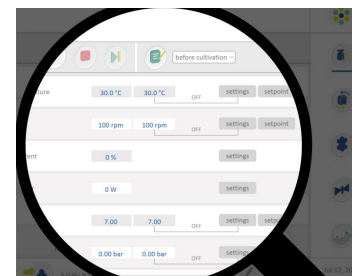

## Workflow

- custom phase manager
- parallel visualization
- cascade settings
- peristaltic pumps function assignable from software

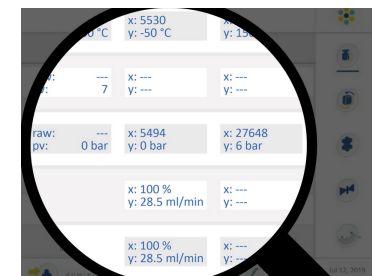

## Calibration

- up to three-point calibration
- simultaneous calibration values for parallel work

<b>Vessel</b>					
<b>Solaris Code</b>	<b>Jupiter 2.0</b>	<b>Jupiter 4.0</b>	<b>Jupiter 6.5</b>	<b>Jupiter 8.0</b>	<b>Jupiter 10.0</b>
Production Code	jpt110300	jpt130395	jpt160395	jpt160480	jpt180480
Total Volume (L)	2,00	4,00	6,50	8,00	10,00
Ratio D/H	1:3,0	1:3,0	1:2,5	1:3,0	1:3,0
Min. Working Volume (L)	0,5	1	1,6	2	2,5
Max. Working Volume (L)	1,5	3	4,8	6	7,5
Max. temperature	70 °C				
Operating pressure	< 0.5 bar (g)				
	Jupiter 2.0 and 4.0: optionally < 2 bar (g)				
Headplate ports (n.10 in Jupiter 2.0; n.1 Sampling/Harvesting, n.1 Temperature, n.1 Multifeed, n.2 Sensors DN12 (pH, dO2, dCO2) , n.1 adjustable level sensor n.12 in the others)	10: n.1 Agitation Group, n.1 Gas Sparger, n.1 Gas Overlay, n.1 Gas Out/Condenser, 12: n.1 Agitation Group, n.1 Gas Sparger, n.1 Gas Overlay, n.1 Gas Out/Condenser, n.1 Sampling/Harvesting, n.1 Temperature, n.1 Multifeed, n.2 Sensors DN12 (pH, dO2, dCO2), n.1 adjustable level sensor, n.2 Spare				
Design	Borosilicate Glass Jacketed Vessel				
Materials	Borosilicate Glass and AISI 316 L				

### Sensors length (mm)

pH	325	425	425	425	425
dO <sub>2</sub>	325	425	425	425	425

### Dimensions for autoclave (with Condenser)

Height (mm)	610	705	705	790	790
Diameter (mm)	275	285	315	315	335

### Stirring

Drive	Brushless Motor				
Speed (rpm)	1-1900	1-1800	1-1700	1-1700	1-1700
Nominal Torque (Nm)	0,9	0,9	0,9	1,1	1,1
Impellers	Select from: Rushtons impellers, Marine impellers, Pitched blade				

### Thermoregulation

Control	PID Control - Accuracy 0,1 °C - Jacketed with Electric Heaters and cooling valve				
---------	--	--	--	--	--

### Gas Control & Gas Mixing

Sparger and overlay Gas Control	TMFC				
Gas Mixing (Air, CO <sub>2</sub> , O <sub>2</sub> , N <sub>2</sub> )	n.1 TMFC (included in entry level) + n.4 solenoid valves or + n. of additional TMFC (up to n.4)				
Sparger type	Select from: Toro type (ring), sintered microbubbling - both provided with 0,22 µm sintered filter				
Gas Out	n. 1 Condenser + 0,22 µm sinterized filter				

### Peristaltic Pumps

	n.4 WM 114 FD/DV 60 rpm				
--	-------------------------	--	--	--	--

### Controller

Master Control Module	From 1 to 24 units - 35x35xh35 cm				
HMI with Leonardo software	Operate interface touch screen PC, 24" color monitor; power consumption 200W				

### Temperature

Sensor	PT100				
Accuracy	± 0,1 °C				
Control system	Measuring resident in Leonardo 3.2 software				
Control range	0 - 150 °C				

### pH

Sensor	Digital sensor				
Sensitivity	57 to 59 mV/pH				
Control system	Measuring resident in Leonardo 3.2 software				
Control range	0 - 14 °C				
Operation temperature	up to 130 °C				
Pressure range	0 - 6 bar				

### dO<sub>2</sub>

Sensor	Digital Optical sensor				
Accuracy	1±0.05%-vol, 21±0.2%-vol, 50±0.5%-vol				
Control system	Measuring resident in Leonardo 3.2 software				
Control range	0 - 300% air saturation				
Operation temperature	up to 130 °C				
Pressure range	0 - 12 bar				

### Antifoam/Level

Sensor	Solaris sensor				
Control	Measuring resident in Leonardo 3.2 software				

### Redox (ORP)

Sensor	Digital sensor				
Control system	Measuring resident in Leonardo 3.2 software				
Control range	± 1500 mV				
Operation temperature	up to 130 °C				
Pressure range	0 - 6 bar				

### Conductivity

Sensor	Digital sensor				
Accuracy	± 3 % at 1 µS/cm to 100 mS/cm, ± 5 % at 100 to 300 mS/cm				
Control system	Measuring resident in Leonardo 3.2 software				
Control range	1 - 300.000 µS/cm				
Operation temperature	up to 130 °C				
Pressure range	0 - 20 bar				

### dCO<sub>2</sub>

Sensor	Analog sensor				
Accuracy	± (10 % of the reading + 10 mbar)				
Control system	Measuring resident in Leonardo 3.2 software				
Control range	0-200% saturation				
Operation temperature	up to 130 °C				

### Cell density

Sensor	Digital sensor				
Control system	Measuring resident in Leonardo 3.2 software				
Operation temperature	0 - 90° up to 141°				
Pressure range	up to 10 bar (150 psi)				
Interfaces	RS485 Modbus				
VCD Measuring Range	Capacitance: 0.0 to 400pF/cm				

### Weight

Sensor	Digital balance				
Accuracy	±0.1 g				
Control	Measuring resident in Leonardo 3.2 software				

### Peristaltic Pumps

WM 120 U Brushless	1-100 rpm				
--------------------	-----------	--	--	--	--